

**ICBVI42B**

**FEATURES**

Four LED lights with two brightness settings

Dishwasher-safe filters

Front-mounted electronic controls

Heavy-duty stainless steel with black glass

Powerful blower options

Telescoping chimney reaches standard ceiling heights

Rigorously tested in our U.S. manufacturing facilities for decades of use

**ACCESSORIES**

Chimney Extension - accommodates most 10' ceilings

Make-up air damper

Recirculating kit and filter for non-ducted applications

Recirculating Filter

Remote Control

Accessories available through an authorized Sub-Zero dealer.

For local dealer information, visit [www.szwasia.com](http://www.szwasia.com)




**BLOWER OPTIONS**

- 300 CFM Internal
- 600 CFM Internal
- 600 CFM Inline
- 600 CFM Remote


**PRODUCT SPECIFICATIONS**

Model	ICBVI42B
Dimensions	1067 mm W x 57 mm H x 673 mm D
Weight	92 lb
Electrical Supply	220-240 VAC, 50/60 Hz
Electrical Service	13 amp dedicated circuit
Discharge Location	Vertical
Discharge Dimensions	6" Round
Bottom of Hood to Countertop	609.6 mm to 914.4 mm

**ELECTRICAL**



**DIMENSIONS**

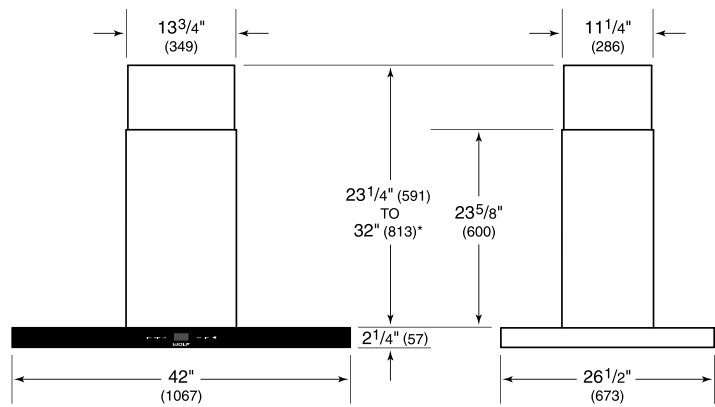

\*46<sup>1</sup>/<sub>4</sub>" (1175) to 55" (1397) with accessory flue extension.